


MXL 目视液位指示器 *Visual level gauges*

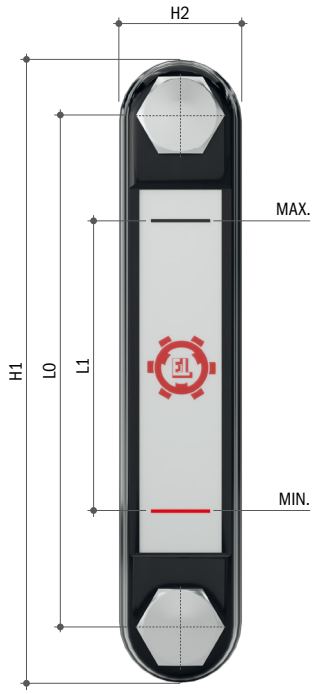

标准型号
STANDARD MODEL

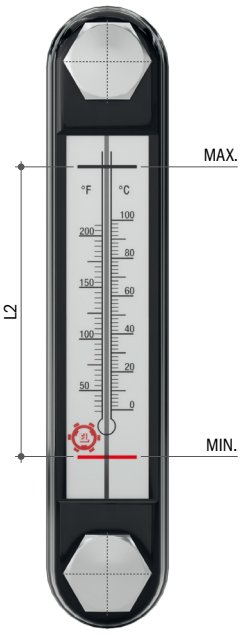


温度计选项
OPTION WITH VISUAL THERMOMETER

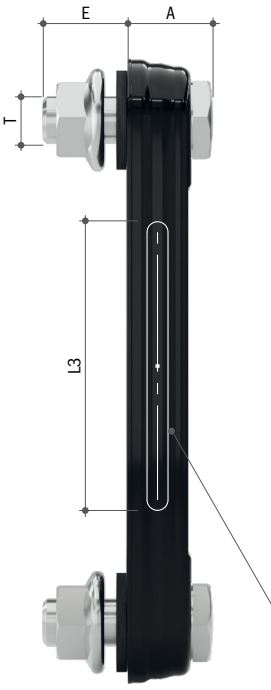

安装 / *MOUNTING*

- 安装在油箱外部，带螺纹孔（M10 / M12）
  Outside the tank with threaded holes (M10 /M12)
- 安装在油箱内部，带通孔和螺母
  Inside the tank with bypass holes and nuts



最高温度	+90°C	*Max. temperature*	*+90°C*
最大静压	3 bar	*Max. static pressure*	*3 bar*
最大流体粘度	500 cSt	*Max. fluid viscosity*	*500 cSt*
壳体	喷漆钢板 (RAL 9005) / PA66 30% G.F.	*Housing*	*Painted sheet metal (RAL 9005) / PA66 30% G.F.*
螺钉和螺母材料	镀锌钢（不锈钢可按要求提供）	*Screws and nuts material*	*Zinc plated steel (Stainless steel on request)*
密封件材料	NBR / FKM	*Seals material*	*NBR / FKM*
视窗材料	透明聚酰胺树脂	*Glass material*	*Transparent polyamide resin*
建议拧紧扭矩	3 Nm	*Recommended tightening torque*	*3 Nm*

如何订购 / *HOW TO ORDER*

MXL76	V	F	M10	N	TV

型号 / *Model*

MXL76
MXL127

壳体材料 / *Materiale corpo*

V	喷漆钢板 / *Painted sheet metal*
L	带开放侧面的喷漆钢板 *Painted sheet metal with side view*
P	PA66 30% G.F.

螺钉材料 / *Screws material*

F	镀锌钢 / *Zinc plated steel*
I	不锈钢（可按要求提供） *Stainless steel (on request)*

螺纹 “T” / *Thread “T”*

M10 - M12

密封件材料 / *Seal material*

N	NBR (-5°C...+90°C)
V	FKM (-5°C...+90°C) 可按要求提供 / *On request*

选项 / *Options*

-	无 / *None*
TV	目视温度计 *Visual thermometer**

* 温度计刻度：
0 ÷ 80°C / 50 ÷ 150°F (MXL76)
0 ÷ 100°C / 50 ÷ 200°F (MXL127)

一般规格 / *GENERAL SPECIFICATIONS*

型号 *MODEL*	L0 mm	H1 mm	H2 mm	E mm	A mm	L1 mm	L2 mm	L3 mm	重量 / *WEIGHT* g
MXL76...	76	107	31	20	23	37	37	34	135
MXL127...	127	158	31	21	22	73	78	85	187

Elettrotec保留未经事先通知更改产品技术数据或暂停生产的权利。该压力控制器触点受到强烈冲击或震动时可能会被损坏。用户有责任对我们的产品是否适合特定应用进行测试，例如，材料的兼容性测试。仅在现场试验中得到证实的使用才会是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累，他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.