




常开触点
NO contact



常闭触点
NC contact

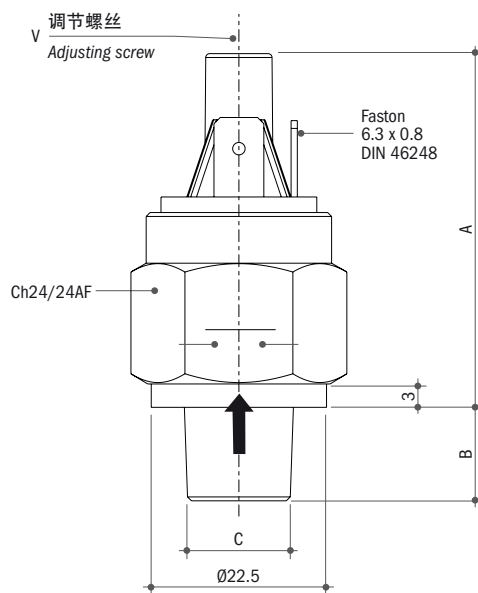


最大电压	250 Vca/60 Hz	Max voltage	250 Vac/60 Hz
电流	0.5 (0.2) A	Current	0.5 (0.2) A
温度范围	-40°C...+140°C (根据膜片/垫圈材料)	Temperature range	-40°C to +140°C (according to diaphragm/gasket material)
25°C时最大循环速率	120/1' (膜片式)	Max. cycle rate at 25°C	120/min (diaphragm type)
25°C时最大循环速率	80/1' (活塞式)	Max. cycle rate at 25°C	80/min (piston type)
防护端子	IP 00	Protection (terminals)	IP 00
带保护帽1的防护	IP 54	Protection with CAP 1	IP 54
带保护帽3的防护	IP 65	Protection with CAP 3	IP 65
开关外壳	尼龙66	Switch housing	PA 66
机械寿命	10 ⁶ 循环	Mechanical life	10 ⁶ operations
强度试验	1500 V - 10 mA - 10"	Strength test	1500 V - 10 mA - 10"
建议拧紧力矩	见第3页	Recommended tightening torque	see page 3

保护帽 / PROTECTION CAPS


防护等级 IP 54 / IP 54 PROTECTION

编号 31060
型号
Type 保护帽 1



防护等级 IP 65 / IP 65 PROTECTION

编号 31015
型号
Type 保护帽 3



如何订购 / HOW TO ORDER

型号 / Model	PM250 -	10	A	B	V	R14	T2D	选项 / Options
PM250 -								SM - T... - T...D - G - SG - TG
范围 / RANGE	1 - 2 - 10 - 20 - 50 - 80 - 150 - 250 - 300							
触点状态 (无压力) / Contact (without pressure)	A - C							
本体 / Body	B - F - W							
隔膜 / Diaphragm	见表隔膜 / 密封垫 see diaphragm / gasket table							
“C”	18K 14K 10K M12 R14 R18 14NPT 18NPT	G1/8 BSPT 锥度/taper G1/4 BSPT 锥度/taper M10x1 锥度/taper M12x1.5 平行/parallel G1/4 BSPP 平行/parallel G1/8 BSPP 平行/parallel 1/4" NPT 锥度/taper 1/8" NPT 锥度/taper	10 12 10 12 12 10 12 10					

订购信息 / ORDERING INFORMATION

PM250	带 6.3 x 0.8 fast-on 连接端子的压力控制器	PM250	Pressure controller with push-on terminals 6.3 x 0.8
触点状态	A 常开触点 (无压力) C 常闭触点 (无压力)	Contact	A N/O contact (without pressure) C N/C contact (without pressure)
本体材料 24AF (见一般规格)	B 黄铜 F 镀锌钢 W 所有型号均可按需配置 316 不锈钢	24 AF body material (see general specifications)	B Brass F Zinc plated steel W S.S. 316 on request for all models
可用隔膜 / 密封垫	N NBR (-5°C 到 +60°C) V FKM (-5°C 到 +90°C) S 硅胶 (-30°C 到 +120°C) NT HNBR (-25°C 到 +140°C) C 氯丁 (-10°C 到 +90°C) E EPDM (-20°C 到 +110°C) MI 不锈钢 (-30°C 到 +140°C) Z ZNBR (-40°C 到 +60°C)	Available diaphragm/ Gasket	N NBR (-5°C to +60°C) V FKM (-5°C to +90°C) S Silicone (-30°C to +120°C) NT HNBR (-25°C to +140°C) C Neoprene (-10°C to +90°C) E EPDM (-20°C to +110°C) MI Stainless steel (-30°C to +140°C) only PMN 1.2.10 Z ZNBR (-40°C to +60°C)
可用螺纹	18K G1/8 BSPT 锥度 14K G1/4 BSPT 锥度 10K M10x1 锥度 M12 M12x1.5 平行 R14 G1/4 BSPP 平行 R18 G1/8 BSPP 平行 14NPT 1/4" NPT 锥度 18NPT 1/8" NPT 锥度	Available threads	18K G1/8 BSPT taper 14K G1/4 BSPT taper 10K M10x1 taper M12 M12x1.5 parallel R14 G1/4 BSPP parallel R18 G1/8 BSPP parallel 14NPT 1/4" NPT taper 18NPT 1/8" NPT taper
选项	SM 压力传感缓冲器 T2 调节向上设定点到所需值 (例如: 2 bar) T2D 调节向下设定点到所需值 (例如: 2 bar) G 用于低电流的镀金触点 SG 脱脂应用于氧气 TG 气体应用测试	Options	SM Snubber for pressure picks T2 Set-point adjustment rising at the required value (ex. 2 bar) T2D Set-point adjustment falling at the required value (ex. 2 bar) G Gold-plated contact for low current SG Degreased for applications with oxygen TG Tested for applications with gas

一般规格 / GENERAL SPECIFICATIONS


型号 MODEL	调整的相对压力 范围 ADJUSTMENT RELATIVE PRESSURE RANGE bar	尺寸 DIMENSIONS "A" mm	最大静压 MAX. STATIC PRESSURE bar			25°C 时固定滞后 FIXED HYSTERESIS AT 25°C bar	25°C 时公差 TOLERANCE AT 25°C bar	配置 EXECUTION
			黄铜配置本体 BRASS BODY EXECUTION	镀锌钢配置本体 ZINC PLATED BODY EXECUTION	316 不锈钢配置 本体 S.S. 316 BODY EXECUTION			
PM250-1	0,1 - 1	~ 46	300	300	300	0,1	±0,1	膜片 Diaphragm
PM250-2	0,15 - 2	~ 46	300	300	300	0,15	±0,15	
PM250-10	2 - 10	~ 46	300	300	300	0,2	±0,2	
PM250-20	10 - 20	~ 46	300	300	300	0,3	±0,4	
PM250-50	20 - 50	~ 46	300	300	300	0,8	±1	
PM250-80	50 - 80	~ 46	300	300	300	5,5	±2	
PM250-150	50 - 150	~ 49		600	600	10	±5	钢活塞 Steel piston
PM250-250	100 - 250	~ 49		600	600	15	±10	
PM250-300	150 - 300	~ 49		600	600	20	±15	

Elettrotec 保留未经事先通知更改产品技术数据或暂停生产的权利。该压力控制器触点受到强烈冲击或震动时可能会被损坏。用户有责任对我们的产品是否适合特定应用进行测试，例如，材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累，他们可能并不适用于所有情况。


Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The pressure controller contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.

常规技术参数 GENERAL TECHNICAL DATA

隔膜式压力控制器，常闭触点 /
MEMBRANE PRESSURE CONTROLLER, NC CONTACT

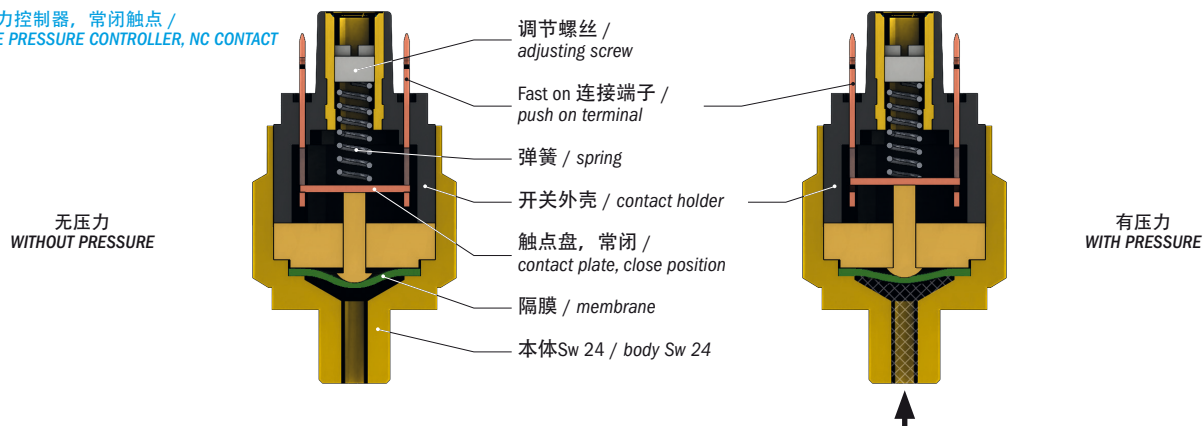

隔膜式压力控制器，常开触点 /
MEMBRANE PRESSURE CONTROLLER, NO CONTACT

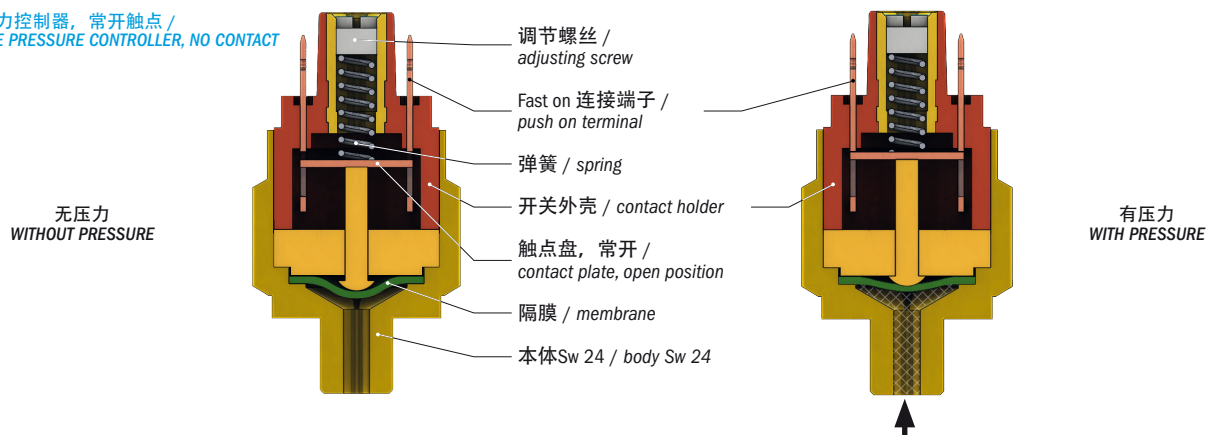

建议紧固力矩 / RECOMMENDED TIGHTENING TORQUES

黄铜 / Brass		镀锌钢 / Zinc plated carbon steel		316不锈钢 / S.S. 316	
螺纹 Thread	建议紧固力矩* Recommended tightening torque Nm	螺纹 Thread	建议紧固力矩* Recommended tightening torque Nm	螺纹 Thread	建议紧固力矩* Recommended tightening torque Nm
R18	17	R18	22	R18	24
18K	17	18K	22	18K	24
18NPT	17	18NPT	22	18NPT	24
5/8UNF	30	5/8UNF	40	5/8UNF	45
R12	40	R12	55	R12	60
R14	25	R14	35	R14	40
14K	25	14K	35	14K	40
14NPT	25	14NPT	35	14NPT	40
M10	18	M10	25	M10	30
M12	23	M12	32	M12	35
10K	18	10K	25	10K	30
34K	50	34K	70	34K	80

电气触点分类 / ELECTRICAL CONTACTS APPLIED

			DIN-EN-60947-5-1 标准 Standard DIN-EN-60947-5-1	IEC60617电气符号 Symbol IEC 60617
NA	NA 常开 NO normally open	单刀单掷 SPST	X	
NC	NC 常闭 NC normally closed	单刀单掷 SPST	Y	
SC	SC 可切换 CO change over (snap action)	单刀双掷 SPDT	C	

* 不适当的扭矩可能会影响开关的机械寿命。相关法规以多种方式表达。伊莱科将材料所能承受的应力限制在屈服点的某个百分比。通过改变用于制造开关本体的材料类型，也将改变紧固扭矩。

* Improper torque may affect the mechanical life of the switch. The relevant legislation has been expressed in various ways. Eletrtec limits the stress tolerated by the material to a percentage of the yield point. By varying the type of material used to make the switch body, will also vary the tightening torque.