


精度	4%	Accuracy	4%
最大压力	10 bar	Max. Pressure	10 bar
工作温度	0 - 60°C	Working Temperature	0 - 60°C
安装	垂直	Fixing	Vertical
本体	丙烯酸酯	Body	Acrylic
浮子	不锈钢	Float	Stainless Steel

变面积流量计, FMP..V系列, FMP..VL型号, 或用于气体的FMP..VG型号, 是在一个回路中监测单相非脉动的液体排量的理想选择。它们设计为面板式, 背面有安装部件和两个螺丝, 集成在本体中, 带螺母可以拧紧。这些流量计有长方形外形, 丙烯酸材料, 上有丝网印刷的刻度, 安装部位为PP或ABS材料, 不锈钢浮球, 氟或硅橡胶的O型圈。

Variable area flow meters, FMP..V series, are ideal to monitor the single-phase non-pulsating discharge of liquid, FMP..VL model, or gas, FMP..VG model, in a circuit. They have been designed for panel mounting with back fittings and 2 screws, integrated in the body, with nuts for fixing. These flow meters have rectangular body in Acrylic with silk-screened graduated scale, PP or ABS fittings, stainless steel float and O-ring available in Silicone or Fluorine rubber.

如何订购 / HOW TO ORDER

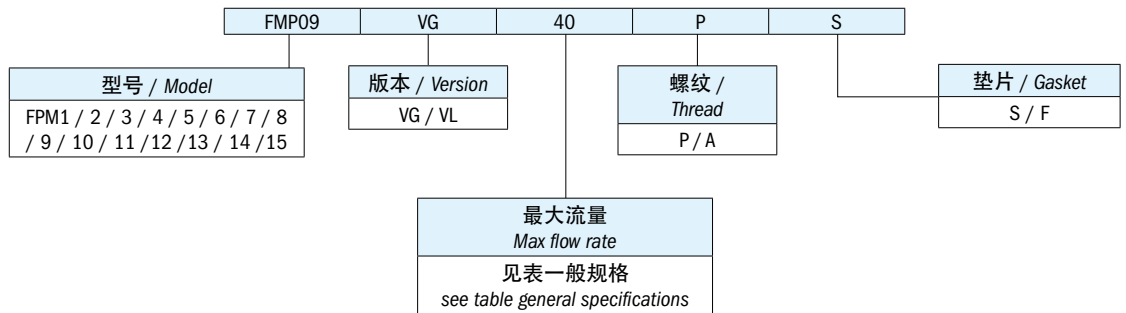

订购信息 / ORDERING INFORMATION

FMP..V	面板式流量计
版本	VG 气 VL 液体
接口	P 聚丙烯 (标准) A ABS (根据要求)
O-环	S 硅胶 (标准) F FPM (根据要求)

FMP..V	Panel Type Flow Meters
Version	VG Gas VL Liquids
Fitting	P Polypropylene (standard) A ABS (on request)
O-ring	S Silicone (standard) F FPM (on request)

一般规格 / GENERAL SPECIFICATIONS

液体流量计 LIQUID FLOW METER			气体流量计 GAS FLOW METER		螺纹 阳接头 BSPT BSPT MALE THREAD	尺寸 / DIMENSIONS 毫米 / mm							
型号 MODEL	范围 / RANGE		型号 MODEL	范围 / RANGE Nm ³ /h (气 / Gas)		A	B	C	D	E	F	G	H
	GPM (液体 / Liquid)	LPM (液体 / Liquid)											
			FMP01VG1	0,1 - 1	G1/2" BSPT	157	32	150	35	25	60	25	110
			FMP02VG6	0,6 - 6	G1/2" BSPT	175	32	168	35	25	76	25	127
FMP03VL100		10 - 100 lt./h			G1/2" BSPT	175	32	168	35	25	76	25	127
FMP04VL160		16 - 160 lt./h			G1/2" BSPT	175	32	168	35	25	76	25	127
FMP05VL250		25 - 250 lt./h			G1/2" BSPT	175	32	168	35	25	76	25	127
FMP06VL4	0,1 - 1	0,5 - 4	FMP06VG10	1 - 10	G1/2" BSPT	175	32	168	35	25	76	25	127
FMP07VL7	0,2 - 2	1 - 7	FMP07VG16	1,6 - 16	G1/2" BSPT	175	32	168	35	25	76	25	127
FMP08VL11	0,3 - 3	1 - 11	FMP08VG25	2,5 - 25	G1/2" BSPT	175	32	168	35	25	76	25	127
FMP09VL18	0,5 - 5	2 - 18	FMP09VG40	4 - 40	G1/2" BSPT	175	32	168	35	25	76	25	127
FMP10VL35	1 - 10	5 - 35			G1" BSPT	234	45	226	46	33	100	37	160
FMP11VL50	2 - 14	10 - 50	FMP11VG100	20 - 100	G1" BSPT	234	45	226	46	33	100	37	160
FMP12VL70	2 - 20	10 - 70	FMP12VG160	16 - 160	G1" BSPT	234	45	226	46	33	100	37	160
FMP13VL130	5 - 35	10 - 130	FMP13VG250	25 - 250	G1" BSPT	234	45	226	46	33	100	37	160
FMP14VL150	5 - 40	10 - 150	FMP14VG300	30 - 300	G1" BSPT	234	45	226	46	33	100	37	160
FMP15VL170	5 - 45	10 - 170	FMP15VG350	35 - 350	G1" BSPT	234	45	226	46	33	100	37	160

ELETTROTEC保留未经事先通知更改产品技术数据或暂停生产的权利。该流量计和流量指示器触点受到强烈冲击或震动时可能会被损坏。用户有责任对我们的产品是否适合特定应用进行测试, 例如, 材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累, 他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The flow meter/flow indicator contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.