



精度	4%	Accuracy	4%
最大压力	10 bar	Max. Pressure	10 bar
工作温度	0 - 60°C	Working Temperature	0 - 60°C
安装	垂直	Fixing	Vertical
管	丙烯酸酯	Tube	Acrylic
接口	聚丙烯 (标准) ABS (根据要求)	Fitting	Polypropylene (standard) ABS (on request)
浮子	不锈钢	Float	Stainless Steel
O-环	硅胶 (标准) FPM (根据要求)	O-ring	Silicone (standard) FPM (on request)

变面积流量计, TFM...V系列, TFM...VL型号, 或用于气体的TFM...VG型号, 是在一个回路中监测单相非脉动的液体排量的理想选择。它们被设计为丙烯酸材料制作的管状, 上面有用丝网印刷的刻度, 安装部位为PP或ABS材料, 不锈钢浮球, 氟或硅橡胶的O型圈。

Variable area flow meters, TFM...V series, are ideal to monitor the single-phase non-pulsating discharge of liquid, TFM...VL model, or gas, TFM...VG model, in a circuit. They have been designed with tube in Acrylic and graduated scale silk-screened directly on it, PP or ABS fittings, stainless steel float and O-ring available in Silicone or Fluorine rubber.

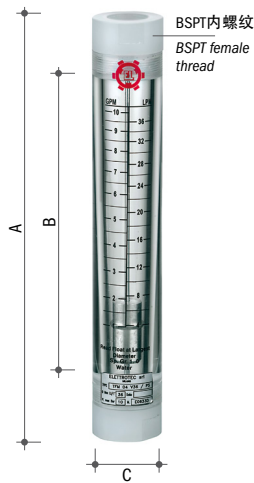

如何订购 / HOW TO ORDER

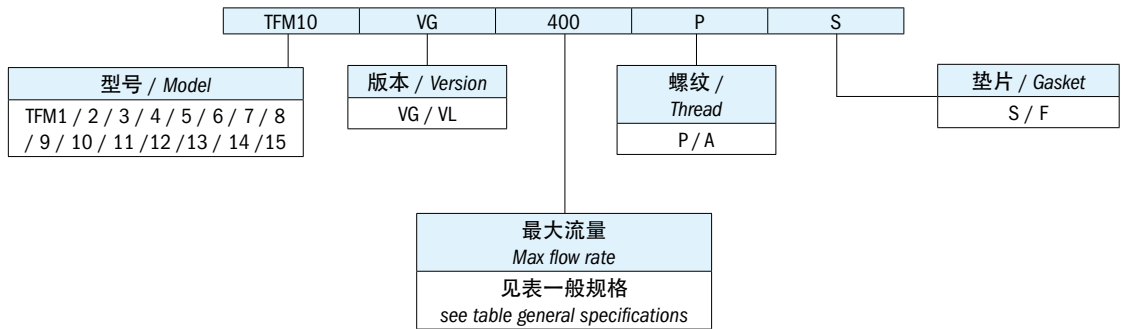

订购信息 / ORDERING INFORMATION

TFM...V	变面积流量计
版本	VG 气 VL 液体
接口	P 聚丙烯 (标准) A ABS (根据要求)
O-环	S 硅胶 (标准) F FPM (根据要求)

TFM...V	Variable Area Flow Meters
Version	VG Gas VL Liquids
Fitting	P Polypropylene (standard) A ABS (on request)
O-ring	S Silicone (standard) F FPM (on request)

一般规格 / GENERAL SPECIFICATIONS

液体流量计 LIQUID FLOW METER			气体流量计 GAS FLOW METER		螺纹 BSPT BSPT THREAD	尺寸 / DIMENSIONS 毫米 / mm		
型号 MODEL	范围 / RANGE		型号 MODEL	范围 / RANGE Nm ³ /h (气 / Gas)		A	B	C
	GPM (液体 / Liquid)	LPM (液体 / Liquid)						
TFM01VL4	0.1 - 1	0.5 - 4	TFM01VG10	1 - 10	G1/2" 阴接头 / Female	210	180	32
TFM02VL7	- 2	1 - 7	TFM02VG16	1.6 - 16	G1/2" 阴接头 / Female	210	180	32
TFM03VL18	0.5 - 5	1.8 - 18	TFM03VG40	4 - 40	G1/2" 阴接头 / Female	210	180	32
TFM04VL36	1 - 10	4 - 36	TFM04VG60	6 - 60	G3/4" 阴接头 / Female	278	236	45
TFM05VL70	2 - 20	10 - 70	TFM05VG160	16 - 160	G1" 阴接头 / Female	265	235	51
TFM06VL100	5 - 30	20 - 100	TFM06VG250	25 - 250	G1" 阴接头 / Female	265	235	51
TFM07VL150	5 - 40	20 - 150	TFM07VG350	35 - 350	G1" 阴接头 / Female	265	235	51
TFM08VL110	5 - 30	20 - 110	TFM08VG250	25 - 250	G1 1/2" 阳接头 / Male	306	235	51
TFM09VL150	5 - 40	20 - 150	TFM09VG350	35 - 350	G1 1/2" 阳接头 / Male	306	235	51
TFM10VL220	20 - 60	80 - 220	TFM10VG400	80 - 400	G1 1/2" 阳接头 / Male	306	235	51
TFM11VL300	20 - 80	80 - 300	TFM11VG500	100 - 500	G2" 阳接头 / Male	380	270	75
TFM12VL360	20 - 100	80 - 360	TFM12VG600	120 - 600	G2" 阳接头 / Male	380	270	75
TFM13VL450	40 - 120	150 - 450	TFM13VG850	300 - 850	G2" 阳接头 / Male	380	270	75
TFM14VL550	50 - 150	190 - 550	TFM14VG1200	400 - 1200	G2" 阳接头 / Male	380	270	75
TFM15VL750	60 - 200	220 - 750	TFM15VG1400	550 - 1400	G2" 阳接头 / Male	380	270	75

ELETTROTEC保留未经事先通知更改产品技术数据或暂停生产的权利。该流量计和流量指示器触点受到强烈冲击或震动时可能会损坏。用户有责任对我们的产品是否适合特定应用进行测试, 例如, 材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累, 他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The flow meter/flow indicator contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.