

TFM2E... 带2个可调节的电气触点的可变面积流量计


Variable Area Flow Meters with 2 adjustable electrical contacts




精度	4%	Accuracy	4%
最大压力	10 bar	Max. pressure	10 bar
工作温度	0-60°C	Working temperature	0-60°C
安装	垂直	Fixing	vertical
管	丙烯酸酯	Tube	Acrylic
接口	聚丙烯(标准) PVC(根据要求)	Fitting	Polipropylene (std) PVC (on request)
浮子	带磁铁的不锈钢	Float	Stainless steel with magnet
O-环	硅胶(标准) FPM(根据要求)	O-ring	Silicone (std) FPM (on request)
额定电压	24V	Rated voltage	24V
额定电流	3A	Rated amperage	3A
绝缘电阻	>10 ⁵ Ω	Insulation impedance	>10 ⁵ Ω
工作温度	0-60°C	Working temperature	0-60°C
电气保护	IP65	Electrical protection	IP65

TFM2E...V系列可变面积流量计是监测回路中液体(TFM2E...VL型号)或气体(TFM2E...VG型号)单相无脉动排放的理想选择。它们的设计采用亚克力管,上面有用丝网印刷的刻度,接口部位为PP或ABS,不锈钢浮子和O形圈(硅橡胶或氟橡胶)。

Variable area flow meters, TFM2E...V series, are ideal to monitor the single-phase non-pulsating discharge of liquid, TFM2E...VL model, or gas, TFM2E...VG model, in a circuit. They have been designed with tube in Acrylic and graduated scale silk-screened directly on it, PP or ABS fittings, stainless steel float and O-ring available in Silicone or Fluorine rubber.

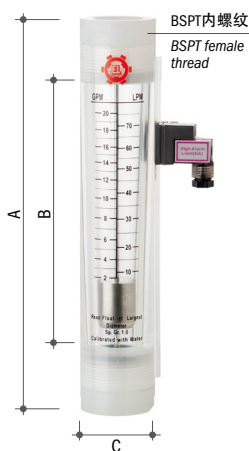

如何订购 / HOW TO ORDER

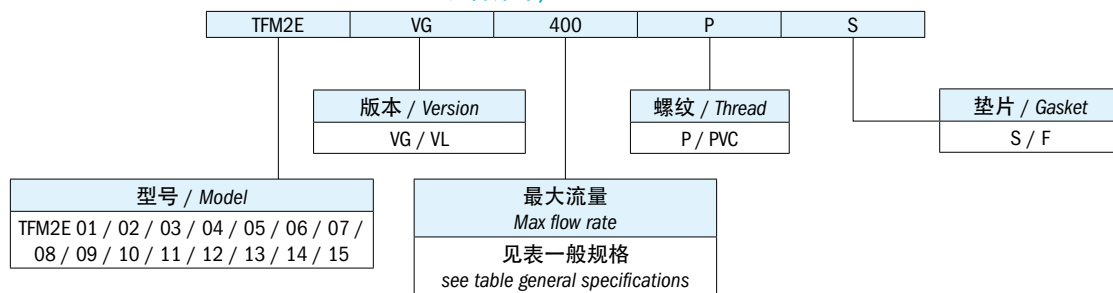

订购信息 / ORDERING INFORMATION

TFM2E... 版本	带2个可调节的电气触点的可变面积流量计
接口	VG 气 VL 液体
O-环	P 聚丙烯(标准) PVC PVC(根据要求)
	S 硅胶(标准) PVC PVC(根据要求)

TFM2E... 版本	Variable Area Flow Meters with 2 adjustable electrical contacts
接口	VG Gas VL Liquids
O-ring	P Polipropylene (std) PVC PVC (on request)
	S Silicone (std) PVC PVC (on request)

远离磁场。

Keep off from possible interacting magnetic fields.

一般规格 / GENERAL SPECIFICATIONS

液体流量计 LIQUID FLOW METER			气体流量计 GAS FLOW METER			尺寸 / DIMENSIONS 毫米 / mm			
型号 MODEL	范围/RANGE		型号 MODEL	范围/RANGE		螺纹 BSPT BSPT THREAD	A	B	C
	GPM (液体 / Liquid)	LPM (液体 / Liquid)		Nm ³ /h (气 / Gas)					
TFM2E01VL4	0,1 - 1	0,5 - 4	TFM2E01VG10	1 - 10		G1/2" Femmina / Female	210	180	32
TFM2E02VL7	- 2	1 - 7	TFM2E02VG16	1,6 - 16		G1/2" Femmina / Female	210	180	32
TFM2E03VL18	0,5 - 5	1,8 - 18	TFM2E03VG40	4 - 40		G1/2" Femmina / Female	210	180	32
TFM2E04VL36	1 - 10	4 - 36	TFM2E04VG60	6 - 60		G3/4" Femmina / Female	278	236	45
TFM2E05VL70	2 - 20	10 - 70	TFM2E05VG160	16 - 160		G1" Femmina / Female	265	235	51
TFM2E06VL100	5 - 30	20 - 100	TFM2E06VG250	25 - 250		G1" Femmina / Female	265	235	51
TFM2E07VL150	5 - 40	20 - 150	TFM2E07VG350	35 - 350		G1" Femmina / Female	265	235	51
TFM2E08VL110	5 - 30	20 - 110	TFM2E08VG250	25 - 250		G1 1/2" Maschio / Male	306	235	51
TFM2E09VL150	5 - 40	20 - 150	TFM2E09VG350	35 - 350		G1 1/2" Maschio / Male	306	235	51
TFM2E10VL220	20 - 60	80 - 220	TFM2E10VG400	80 - 400		G1 1/2" Maschio / Male	306	235	51
TFM2E11VL300	20 - 80	80 - 300	TFM2E11VG500	100 - 500		G2" Maschio / Male	380	270	75
TFM2E12VL360	20 - 100	80 - 360	TFM2E12VG600	120 - 600		G2" Maschio / Male	380	270	75
TFM2E13VL450	40 - 120	150 - 450	TFM2E13VG850	300 - 850		G2" Maschio / Male	380	270	75
TFM2E14VL550	50 - 150	190 - 550	TFM2E14VG1200	400 - 1200		G2" Maschio / Male	380	270	75
TFM2E15VL750	60 - 200	220 - 750	TFM2E15VG1400	550 - 1400		G2" Maschio / Male	380	270	75

ELETTROTEC保留未经事先通知更改产品技术数据或暂停生产的权利。该流量计和流量指示器触点受到强烈冲击或震动时可能会损坏。用户有责任对我们的产品是否适合特定应用进行测试,例如,材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累,他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The flow meter/flow indicator contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.