


开关容量	120 Vca / 15A (电阻) 240 Vca / 10A (电阻) 12 Vcc / 10A (电阻) 24 Vcc / 5A (电阻)	Switch rating	120 Vac / 15A (resistive) 240 Vac / 10A (resistive) 12 Vdc / 10A (resistive) 24 Vdc / 5A (resistive)
最高温度	125°C	Maximum temperature	125°C
运行寿命	100.000	Operations	100.000
最大压力	200 bar	Max pressure	200 bar
最大复位差	16°C	Max differential DT	16°C
防护等级	IP00 见页1	Protection	IP00 see page 1
帽子1-10的防护等级	IP54 见页1	Protection with CAP1 - CAP10	IP54 see page 1
拧紧力矩	30 Nm	Tightening torque	30 Nm

如何订购 / HOW TO ORDER

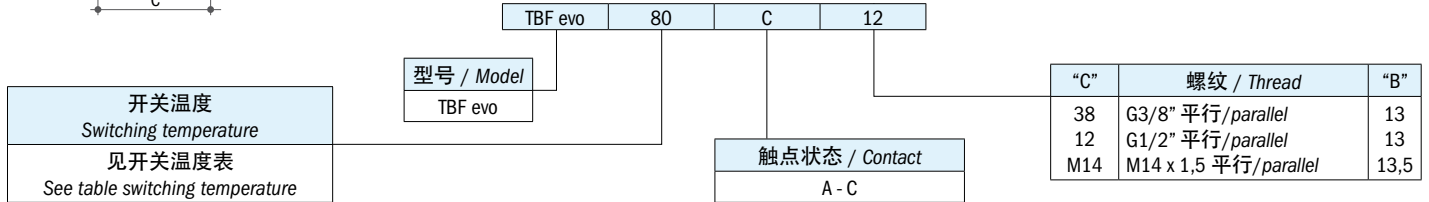

开关温度 Switching temperature
见开关温度表 See table switching temperature

订购信息 / ORDERING INFORMATION

TBF evo	固定温度控制器推入式端子
动作点	25°C 35°C 45°C 50°C 55°C 60°C 65°C 70°C 75°C 80°C 85°C 90°C 95°C 100°C 105°C 110°C 125°C
螺纹“C”	38 G3/8" 平行 12 G1/2" 平行 M14 M14 x 1,5 平行
触点状态	A NO常开触点 C NC常闭触点

TBF evo	Fixed temperature controller with push-on terminals
Actuation point	25°C 35°C 45°C 50°C 55°C 60°C 65°C 70°C 75°C 80°C 85°C 90°C 95°C 100°C 105°C 110°C 125°C
Threads “C”	38 G3/8" parallel 12 G1/2" parallel M14 M14 X 1,5 parallel
Contact	A NO contact C NC contact

一般规格 / GENERAL SPECIFICATIONS

型号 MODEL	开关温度 SWITCHING TEMPERATURE	精度 ACCURACY	尺寸 DIMENSIONS	标准配置黄铜本体 STANDARD EXECUTION BRASS BODY	重量 WEIGHT
			毫米 / mm	最大静压 MAX. STATIC PRESSURE	
TBF evo	25°C	± 5°C	26	200	~55
	35°C				
	45°C				
	50°C				
	55°C				
	60°C				
	65°C				
	70°C				
	75°C				
	80°C				
	85°C				
	90°C				
	95°C				
	100°C				
	105°C				
110°C					
125°C					

ELETTROTEC保留未经事先通知更改产品技术数据或暂停生产的权利。该温度控制器触点受到强烈冲击或震动时可能会被损坏。用户有责任对我们的产品是否适合特定应用进行测试，例如，材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累，他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The temperature controller contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.

**电气保护 /
ELECTRIC PROTECTIONS**

	NTB	TBF ev0	NTBC	EBT	EBC	TBLFPA TBLTPA	TCR
页 /Page	3	4	5	6	7	8	9
电气保护IP54 / 保护帽1 / IP 54 electric protection CAP 1 		●					
保护帽10 / CAP 10 		●					
电气保护IP65 / Din 40050 连接器 / IP 65 electric protection Din 40050 Connector 	●		●	●	●	●	
电气保护IP67 / 保护帽14+飞线+连接器 IP 67 electric protection Cap 14 + Flying Leads + Connector 		●					
M12连接器 / M12 Connector 	●		●	●	●	●	

ELETTROTEC保留未经事先通知更改产品技术数据或暂停生产的权利。该温度控制器触点受到强烈冲击或震动时可能会被损坏。用户有责任对我们的产品是否适合特定应用进行测试，例如，材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累，他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The temperature controller contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.