




开关容量	120 Vac /15 A (电阻式) 240 Vac /10 A (电阻式) 12 Vdc /10 A (电阻式) 24 Vdc /5 A (电阻式)	Switch rating	120 Vac /15 A (resistive) 240 Vac /10 A (resistive) 12 Vdc /10 A (resistive) 24 Vdc /5 A (resistive)
最高温度	125°C	Max. temperature	125°C
环境温度	-20°C 至 +90°C	Environment temperature	-20°C to +90°C
精度	±5°C	Accuracy	±5°C
最大复位差	16°C	Max. differential DT	16°C
运行寿命	100.000	Operations	100.000
最大静压	100 bar	Max. static pressure	100 bar
防护等级	IP67 见页1	Protection	IP67 see page 1
拧紧力矩	30 Nm	Tightening torque	30 Nm

如何订购 / HOW TO ORDER

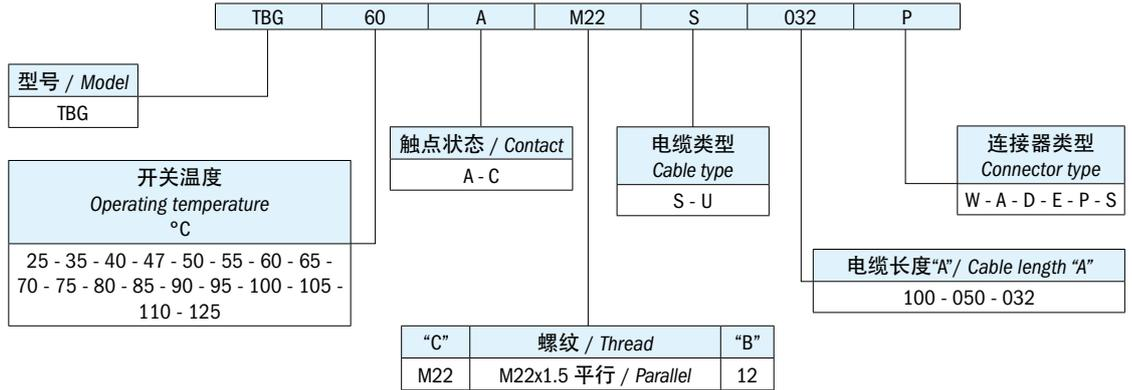


订购信息 / ORDERING INFORMATION

TBG	紧凑型温度控制器
动作点	50°C 60°C 70°C 80°C
触点状态	A NO 常开 C NC 常闭
螺纹连接	M22 M22x1.5 平行
电缆类型	S 2x1 mm ² PVC 电缆 U 2x0.5 mm ² PVC 电缆
电缆长度“A”	100 1 m 050 500 mm 032 320 mm
连接器类型	W 不带连接器的电缆 A Amp Superseal 公连接器 D Delphi Metripack 280 母连接器 E Delphi Metripack 280 公连接器 P Deutsch DT04-2P S Deutsch DT06-2S

TBG	Compact temperature switch
Operating temperature	50°C 60°C 70°C 80°C
Contact type	A NO normally open C NC normally closed
Thread connection	M22 M22x1.5 parallel
Cable type	S 2x1 mm ² PVC cable U 2x0.5 mm ² PVC cable
Cable length "A"	100 1 m 050 500 mm 032 320 mm
Connector type	W Cables without connector A Amp Superseal male D Delphi Metripack 280 female E Delphi Metripack 280 male P Deutsch DT04-2P S Deutsch DT06-2S

连接器类型 / CONNECTOR TYPE

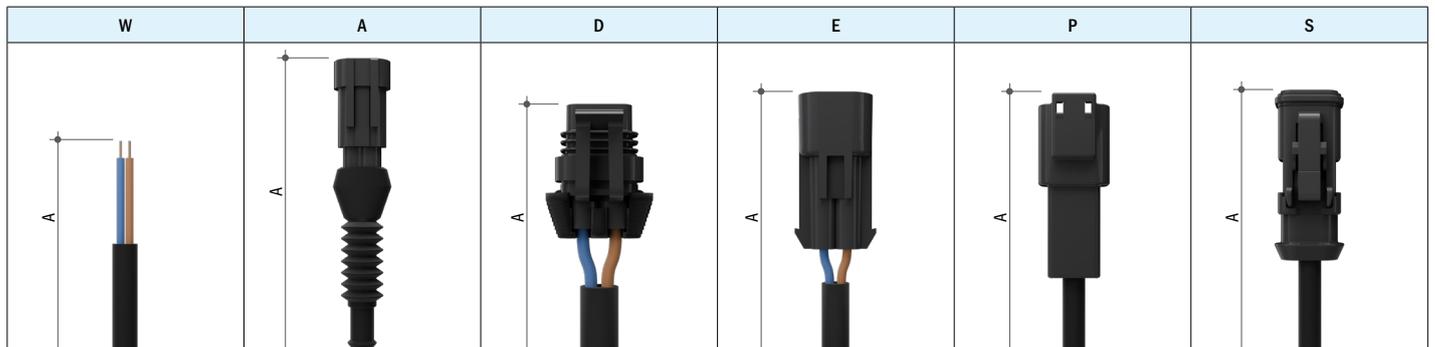

Elettrotec保留未经事先通知更改产品技术数据或暂停生产的权利。该温度控制器触点受到强烈冲击或震动时可能会被损坏。用户有责任对我们的产品是否适合特定应用进行测试，例如，材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累，他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The temperature controller contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.

温度控制器 / TEMPERATURE CONTROLLERS

电气保护 ELECTRIC PROTECTIONS

页 / Page	NTB	TBF evo	NTBC	EBT	EBC	TBLFPA TBLTPA	TCR	TBG	TER
电气保护IP54 <i>IP 54 electric protection</i> 保护帽1 CAP. 1 		●							
保护帽10 CAP. 10 		●							
电气保护IP65 <i>IP 65 electric protection</i> Din 40050 连接器 Din 40050 connector 	●		●	●	●	●			
电气保护IP67 <i>IP 67 electric protection</i> 飞线+连接器和IP67电气保护 (+保护帽CAP14仅适用于TBF evo) Flying leads + connector and IP 67 electric protection (+ CAP.14 only for TBF evo) 		●					●	●	
M12连接器 / M12 connector 	●		●	●	●	●			

Elettrotec保留未经事先通知更改产品技术数据或暂停生产的权利。该温度控制器触点受到强烈冲击或震动时可能会被损坏。用户有责任对我们的产品是否适合特定应用进行测试，例如，材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累，他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The temperature controller contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.