


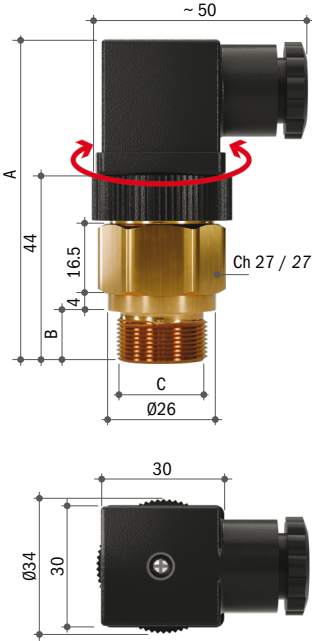

开关容量	10 A / 250 Vac	Switch rating	10 A / 250 Vac
最大压力	300 bar	Max. pressure	300 bar
最大复位差	16°C	Max. differential DT	16°C
最高温度	120°C	Max. temperature	120°C
防护等级	IP65 见页1	Protection	IP65 see page 1
插入接头	DIN 43650	PG09 plug connector	DIN 43650
拧紧力矩	30 Nm	Tightening torque	30 Nm
温控器体	黄铜	Body material	Brass
触点状态	镀银	Contacts	Silver plated

如何订购 / HOW TO ORDER

NTR	50	C	C
型号 / Model	NTR	触点状态 / Contact	A - C
开关温度 / Operating temperature °C	30 - 40 - 50 - 60 - 70 - 80 - 90 - 100 - 105	"C"	螺纹 / Thread "B"
		B	G 3/8" 平行 / Parallel 12
		C	G 1/2" 平行 / Parallel 12
		D	M22x1.5 平行 / Parallel 12
		其他规格螺纹可定制 Different threads on request	

订购信息 / ORDERING INFORMATION

NTR	固定设定点的温度控制器
动作点	30°C
	40°C
	50°C
	60°C
	70°C
	80°C
	90°C
	100°C
	105°C
螺纹"C"	B G 3/8" 平行
	C G 1/2" 平行
	D M22x1.5 平行
	其他规格螺纹可定制
触点状态	A 常开触点
	C 常闭触点

NTR	Temperature controllers with fixed set-point
Operating temperature	30°C
	40°C
	50°C
	60°C
	70°C
	80°C
	90°C
	100°C
	105°C
Available threads "C"	B G 3/8" parallel
	C G 1/2" parallel
	D M22x1.5 parallel
	Different threads on request
Contact type	A NO normally open
	C NC normally closed

一般规格 / GENERAL SPECIFICATIONS

型号 MODEL	开关温度 OPERATING TEMPERATURE °C	精度 ACCURACY	尺寸 DIMENSIONS 毫米 / mm		标准配置黄铜本体 STANDARD EXECUTION BRASS BODY	重量 WEIGHT 克 / g
			A	B	最大静压 MAX. STATIC PRESSURE bar	
NTR	30	±5°C	~76	12	300	~100
	40					
	50					
	60					
	70					
	80					
	90					
	100					
	105					

Elettrotec保留未经事先通知更改产品技术数据或暂停生产的权利。该温度控制器触点受到强烈冲击或震动时可能会被损坏。用户有责任对我们的产品是否适合特定应用进行测试，例如，材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累，他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The temperature controller contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.

温度控制器 / TEMPERATURE CONTROLLERS

电气保护 ELECTRIC PROTECTIONS

页 / Page	NTB	TBF evo	NTBC	EBT	EBC	TBLFPA TBLTPA	TCR	TBG	TER	NTR
电气保护IP54 IP 54 electric protection 保护帽1 CAP. 1 										
保护帽10 CAP. 10 										
电气保护IP65 IP 65 electric protection Din 40050 连接器 Din 40050 connector 										
电气保护IP67 IP 67 electric protection 飞线+连接器和IP67电气保护 (+保护帽CAP14仅适用于TBF evo) Flying leads + connector and IP 67 electric protection (+ CAP.14 only for TBF evo) 										
M12连接器 / M12 connector 										

Elettrotec保留未经事先通知更改产品技术数据或暂停生产的权利。该温度控制器触点受到强烈冲击或震动时可能会损坏。用户有责任对我们的产品是否适合特定应用进行测试，例如，材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累，他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The temperature controller contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.