


开关容量	250 Vca / 10 A	Switch rating	10A / 250 Vac
最大压力	80 bar	Max pressure	80 bar
最大复位差	16°C	Max. differential DT	16°C
最高温度	120°C	Max. temperature	120°C
防护等级	IP65 见页1	Protection	IP65 see page 1
插入接头PG09	DIN 43650	PG09 plug connector	DIN 43650
拧紧力矩	30 Nm	Tightening torque	30 Nm
材料		Materials	
本体	黄铜	Body	Brass
触点状态	镀银	Contacts	Silver-plated

如何订购 / HOW TO ORDER

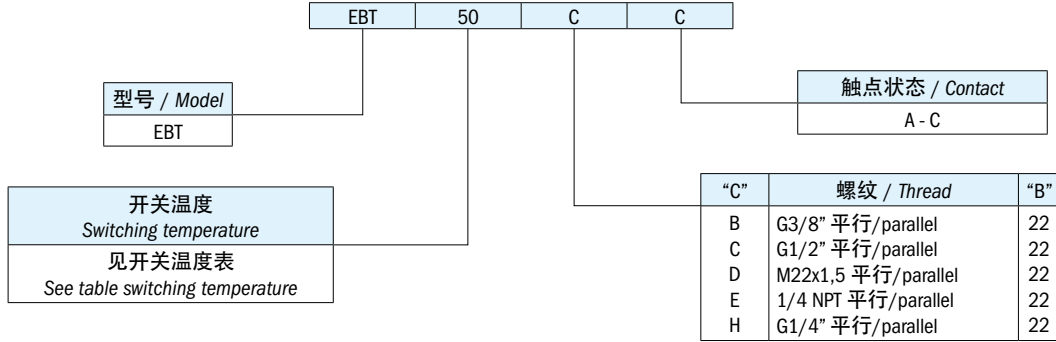

订购信息 / ORDERING INFORMATION

EBT	带PG09电缆夹的固定温度控制器	EBT	Fixed temperature controller with PG09
动作点	30°C 40°C 50°C 60°C 70°C 80°C 90°C 100°C 105°C	Actuation point	30°C 40°C 50°C 60°C 70°C 80°C 90°C 100°C 105°C
螺纹“C”	B G3/8" 平行 C G1/2" 平行 D M22x1,5 平行 E 1/4 NPT 平行 H G1/4" 平行	Threads “C”	B G3/8" parallel C G1/2" parallel D M22x1,5 parallel E 1/4 NPT parallel H G1/4" parallel
触点状态	A NO常开触点 C NC常闭触点	Contact	A NO contact C NC contact

一般规格 / GENERAL SPECIFICATIONS

型号 MODEL	开关温度 SWITCHING TEMPERATURE	精度 ACCURACY	尺寸 DIMENSIONS 毫米 / mm		标准配置黄铜本体 STANDARD EXECUTION BRASS BODY	重量 WEIGHT 克 / g
			A	B	最大静压 MAX. STATIC PRESSURE bar	
EBT	30°C	± 5°C	58	22	200	~92
	40°C					
	50°C					
	60°C					
	70°C					
	80°C					
	90°C					
100°C						
105°C						

ELETTROTEC保留未经事先通知更改产品技术数据或暂停生产的权利。该温度控制器触点受到强烈冲击或震动时可能会损坏。用户有责任对我们的产品是否适合特定应用进行测试，例如，材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累，他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The temperature controller contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.

**电气保护 /
ELECTRIC PROTECTIONS**

	NTB	TBF eVo	NTBC	EBT	EBC	TBLFPA TBLTPA	TCR
页 /Page	3	4	5	6	7	8	9
电气保护IP54 / 保护帽1 / IP 54 electric CAP 1 protection 		●					
保护帽10 / CAP 10 		●					
电气保护IP65 / Din 40050 连接器 / IP 65 electric Din 40050 Connector protection 	●		●	●	●	●	
电气保护IP67 / 保护帽14+飞线+连接器 IP 67 electric Cap 14 + Flying Leads + Connector protection 		●					
M12连接器 / M12 Connector 	●		●	●	●	●	

ELETTROTEC保留未经事先通知更改产品技术数据或暂停生产的权利。该温度控制器触点受到强烈冲击或震动时可能会被损坏。用户有责任对我们的产品是否适合特定应用进行测试，例如，材料的兼容性测试。仅在现场试验中得到证实的使用才是适当的。该样本中的技术信息基于产品开发过程中的测试和经验值的积累，他们可能并不适用于所有情况。

Elettrotec reserves the right to technical data of change to the products or halt production without prior notice. The temperature controller contacts can be damaged when subject to strong shocks or high vibration. It is the responsibility of the user to test the suitability of our products for the particular application, for example, the verification of material compatibility. The use may only be appropriate if proven in field tests. The technical information in this catalogue are based on tests made during product development and based on empirically gathered values. They may not be applicable in all cases.